



T & U

T & U Brand in
America
★ HYTSU

FG20T 4000 lb. LPG
FD20T 4000 lb. Diesel

**Truck
Specifications**




Continuing the tradition of reliable forklift manufacturing and workmanship, Hytsu is proud to produce one of the best lines of material handling equipment available to the industry today.

HYTSU GROUP
HYTSU Hong Kong Limited
Tel: 86-021-58690003

HYTSU NORTH AMERICA

GLOBAL PRODUCTS LTD.
N118 W19328 Bunsen Drive Germantown, WI 53022
Phone (262) 255-2261 Fax (262) 255-4190

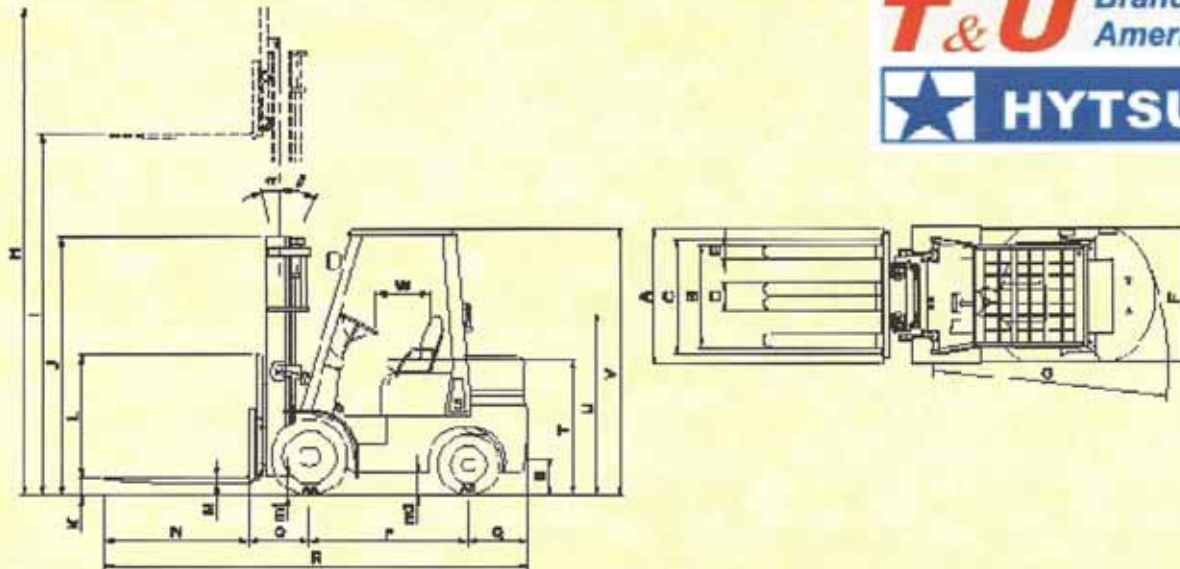

DIMENSIONS (in.)				MAIN SPECIFICATIONS			
		LPG	Diesel			LPG	Diesel
Item	Model	FG20T	FD20T	Item	Model	FG20T	FD20T
Capacity	lbs	4000	4000	Load (lbs)		4000	4000
Load center	in	24	24	Load Center (in.)		24	24
Overall width	A	45.3	45.3	Mast tilting range (deg)	Front	6	6
Outside width between forks	B	41	41		Rear	12	12
Front wheels tread	C	44	44	Lifting speed (FPM)	No load	114	114
Width of two forks	D	9.6	9.6		Full load	108	108
Width of one fork	E	4.8	4.8	Lowering speed (FPM)	No load	108	108
Rear wheels tread	F	44	44		Full load	88	88
Min. turning radius, Outside	G	88	88	Travel speed (MPH)	No load	11.4	11.4
Max height overall	H	169/178	169/178		Full load	10.2	10.2
Max. fork height	I	130	130	Gradeability (deg)	No load	25	25
Height of mast	J	84	84		Full load	25	25
Free lift	K	6	6	Net weight (lbs)		7511/7335	7558/7382
Height of load backrest	L	39/48	39/48	Max. drawbar pull (lbs)		3744/3634	3744/3634
Max. thickness of fork	M	1.6	1.6	Standard features include:			
Length of fork	N	42	42	Automatic transmission with trans cooler, 3rd valve and handle, high air intake, class II carriage with six roller bearings, headlights, back-up & brake lights, and turn signals			
Distance between front and center of wheel	O	21	21	Engine Options:			
Wheel Base	P	63	63	LPG	Mitsubishi	4G64	57 HP
Distance between counter-weight and center of rear wheel	Q	17	17	Diesel (std.)	Isuzu	C240	47 HP
Overall length	R	143	143	Diesel (opt.)	Isuzu	4JG2	61 HP
Ground At lowest point	m1	4.3	4.3	Specifications are subject to improvements and changes without notice			
Clearance Center of wheelbase	m2	6.0	6.0	In effect 08/08			
Seat height	T	42	42				
Height of steering wheel	U	58	58				
Height of overhead guard	V	82.5	82.5				
Dimension of front wheel	AA	7.00-12-12 P.R. (Pneumatic)					
Dimension of rear wheel	AB	6.00-9-10 P.R. (Pneumatic)					

Contact Dealer for Additional Options including Masts, Cabs, Side shifters, Forks, Tires, Attachments, Etc.

HYTSU NORTH AMERICA

GLOBAL PRODUCTS LTD.
 N118 W19328 Bunsen Drive Germantown, WI 53022
 Phone (262) 255-2261 Fax (262) 255-4190

HYTSU GROUP
 HYTSU Hong Kong Limited
 Tel: 86-021-58690003