



# T & U



**FG35T 7000 lb. LPG**  
**FD35T 7000 lb. Diesel**

**Truck  
Specifications**




Continuing the tradition of reliable forklift manufacturing and workmanship, Hytsu is proud to produce one of the best lines of material handling equipment available to the industry today.

**HYTSU GROUP**  
HYTSU Hong Kong Limited  
Tel: 86-021-58690003

## **HYTSU NORTH AMERICA**

GLOBAL PRODUCTS LTD.  
N118 W19328 Bunsen Drive Germantown, WI 53022  
Phone (262) 255-2261 Fax (262) 255-4190

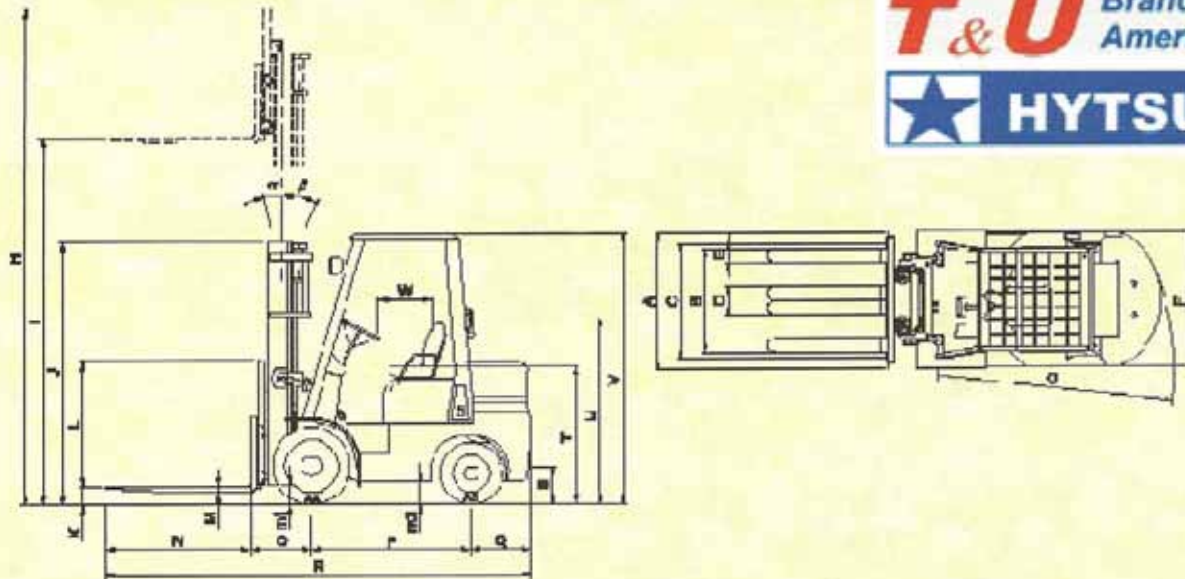

<b>DIMENSIONS (in.)</b>				<b>MAIN SPECIFICATIONS</b>			
Item	Model	LPG FG35T	Diesel FD35T	Item	Model	LPG FG35T	Diesel FD35T
Capacity	lbs	7000	7000	Load (lbs)		7000	7000
Load center	in	24	24	Load Center (in.)		24	24
Overall width	A	48.2	48.2	Mast tilting range (deg)	Front	6	6
Outside width between forks	B	43	43		Rear	12	12
Front wheels tread	C	46	46	Lifting speed (FPM)	No load	98	98
Width of two forks	D	9.8	9.8		Full load	88	88
Width of one fork	E	4.9	4.9	Lowering speed (FPM)	No load	82	82
Rear wheels tread	F	46	46		Full load	88	88
Min. turning radius. Outside	G	94	94	Travel speed (MPH)	No load	11.7	11.7
Max height overall	H	157/166	157/166		Full load	10.8	10.8
Max. fork height	I	118	118	Gradeability (deg)	No load	20	20
Height of mast	J	82	82		Full load	20	20
Free lift	K	6	6	Net weight (lbs)		10528/10352	10751/10399
Height of load backrest	L	39/48	39/48	Max. drawbar pull (lbs)		3696/3584	3696/3584
Max. thickness of fork	M	1.8	1.8	<b>Standard features include:</b>			
Length of fork	N	42	42	Automatic transmission with trans cooler, 3rd valve and handle, high air intake, class II carriage with six roller bearings, headlights, back-up & brake lights, and turn signals			
Distance between front and center of wheel	O	21	21	<b>Engine Options:</b>			
Wheel Base	P	67	67	LPG	Mitsubishi	4G64	57 HP
Distance between counter-weight and center of rear wheel	Q	25	25	Diesel	Isuzu	4JG2	61 HP
Overall length	R	155	155				
Ground At lowest point	m1	5.3	5.3				
Clearance Center of wheelbase	m2	6.0	6.0				
Seat height	T	42	42				
Height of steering wheel	U	58	58				
Height of overhead guard	V	82.5	82.5				
Dimension of front wheel	AA	28.9-15-15 P.R. (Pneumatic)					
Dimension of rear wheel	AB	6.00-10-10 P.R. (Pneumatic)					

Contact Dealer for Additional Options including Masts, Cabs, Side shifters, Forks, Tires, Attachments, Etc.

## HYTSU NORTH AMERICA

GLOBAL PRODUCTS LTD.  
 N118 WI9328 Bunsen Drive Germantown, WI 53022  
 Phone (262) 255-2261 Fax (262) 255-4190

**HYTSU GROUP**  
**HYTSU Hong Kong Limited**  
 Tel: 86-021-58690003